


# OUTDOOR DISCONNECTOR

*Rastavljač za vanjsku montažu*

Kat.br. 5E 01567  
HŽ šifra:

**EK VR2-25-600**

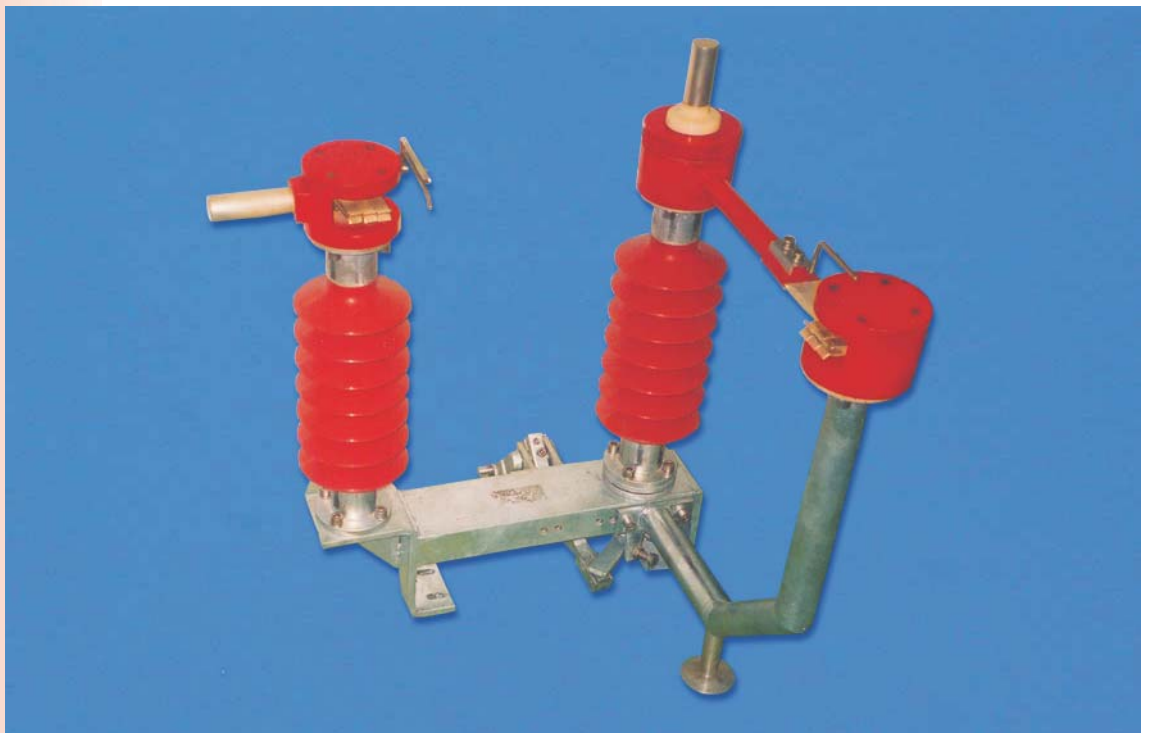

**Purpose is for visible disconnecting of electrical circuits.  
Disconnecter could be driven manually or electrically.**

Rastavljač EK-VR2-25/600 služi vidljivom odvajanju pojedinih strujnih krugova od napona. Isklapanje i uklapanje vrši se ručno ili elektromotorom.


CONTROL AND  
SIGNALLING  
TECHNOLOGY

**ELEKTROKEM**



industrijska elektronika

A. Šenoa 69, Vugrovec, 10360 Sesvete, Hrvatska  
tel. +385 1 2051 400, fax. +385 1 2051 406  
elektrokem@elektrokem.hinet.hr  
<http://www.elektrokem.hr>

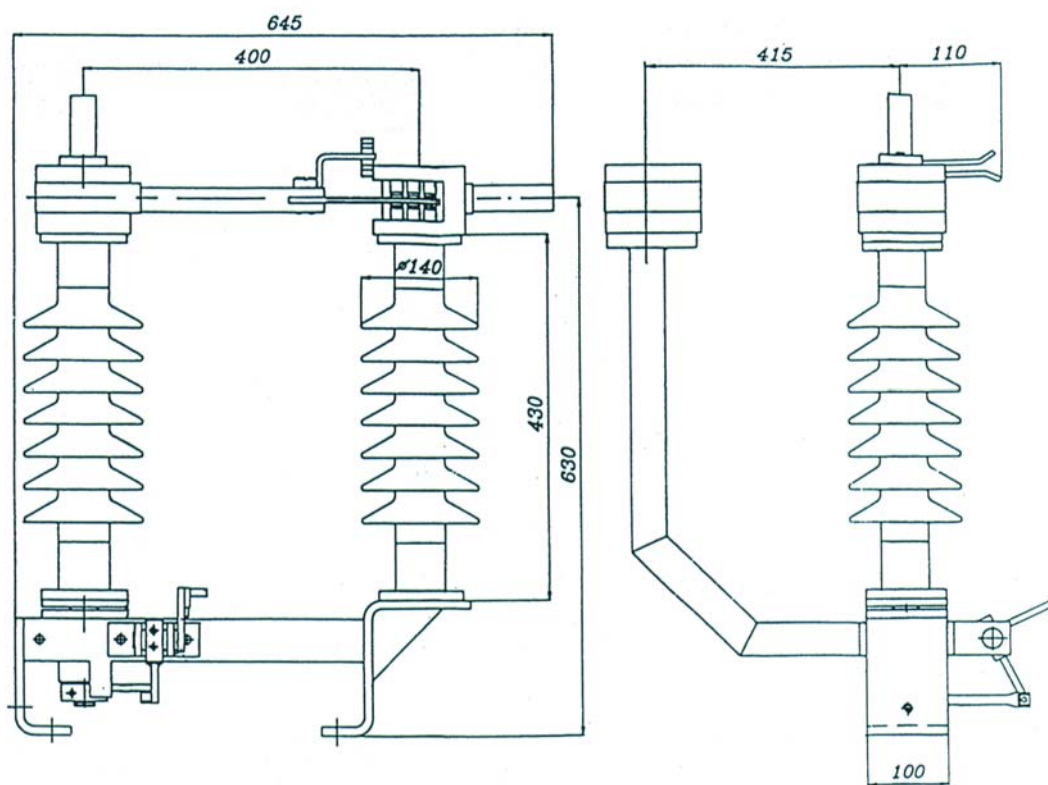

<b>Nominal voltage</b> / Nazivni napon:	<b>25kV</b>
<b>Nominal continuously current</b> / Nazivna trajna struja:	<b>600A</b>
<b>Nominal breaking capacity (cos <math>\phi</math>=0.7)</b> / Nazivna prekidna moć(uz cos $\phi$ =0.7):	<b>6A</b>
<b>Nominal current (1sec)</b> / Nazivna kratkotrajna struja 1 s: A	<b>20kA</b>
<b>Nominal short current circuit (peak value)</b> / Nazivna vršna vrijednost struje kratkog spoja:	<b>50kA</b>
<b>Max. bearable voltage (50Hz, 1min closed contacts)</b> / Podnosivi izmjenični napon 50Hz, 1 min. (zatvoreni kontakt):	<b>70kV</b>
<b>Step voltage (closed contacts)</b> / Udarni napon (zatvoreni kontakt) :	<b>170kV</b>
<b>Max. bearable voltage (50Hz, 1min open contacts)</b> / Podnosivi izmjenični napon 50Hz, 1 min. (otvoreni kontakt):	<b>80kV</b>
<b>Step voltage (opened contacts)</b> / Udarni napon (otvoreni kontakt):	<b>195kV</b>