

PC POWER SOCKET 230 V, 50 Hz WITH POWER LIMIT 150 VA

Kat.br. 5E 01530
HŽ šifra:

EK UP-2

Railway Rolling Stock



- **ELECTRONIC POWER LIMIT** elektronički limit
- **SWITCH OFF BY OVERLOAD** isključenje kod preopterećenja
- **SWITCH OFF BY SHORT CIRCUIT** isključenje kod kratkog spoja
- **AUTOMATIC SWITCH ON AFTER 20 SECONDS** automatsko uključenje nakon 20 sekundi
- **SWITCH OFF (OVERLOAD) INDICATION** indikacija preopterećenja
- **SWITCH ON (POWER) INDICATION** indikacija prisustva napajanja
- **CERTIFIED EN 50155, UIC 554-1** atestirano prema EN 50155, UIC 554-1
- **RAIL / ROAD VEHICLE APPLICATION** namijenjeno za ugradnju u vozila


**CONTROL
SYSTEMS**

ELEKTROKEM



industrijska elektronika

A. Šenoje 69, Vugrovec, 10360 Sesvete, Hrvatska
tel. +385 1 2051 400, fax. +385 1 2051 406
elektrokem@elektrokem.hinet.hr
<http://www.elektrokem.hr>

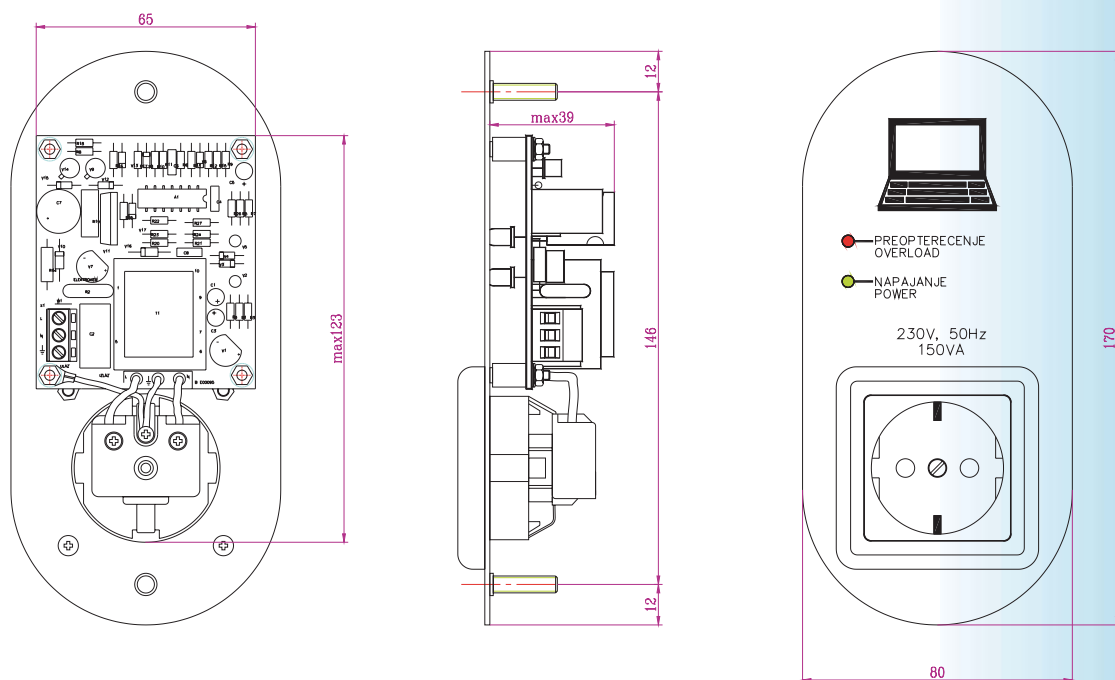

Nominal voltage / Nazivni napon	220 V , 50 Hz
Input voltage tolerance / Dozvoljeno odstupanje napona	180 – 250 V
Rated current / Nazivna struja	680 mA
Rated power / Nazivna snaga	150 W
Switch off current / Struja isključenja prekidača	720-800 mA
Switch off delay / Vrijeme zatezanja isključenja	500 msek
Switch on delay / Vrijeme zatezanja uključenja	15-20 sek
Short circuit current / Struja kratkog spoja	60-90 A
Short circuit duration / Trajanje kratkog spoja	15 - 30 μsek
Operating ambient temperature / Radna temperatura okoline	-25 °C do + 45 °C / -25 °C do + 45 °C
Insulation resistance to casing / Izolacioni napon prema kućištu	> 10 MΩ
Length / Dužina	140 mm
Width / Širina	80 mm
Height / Visina	40 mm
Weight / Masa	300 g
Complies to standards / Udovoljava standardima	UIC 554-1 , IEC 60571