


SOFT START MODULE

Soft start modul

Broj dijela: E14138

EK APUK-25

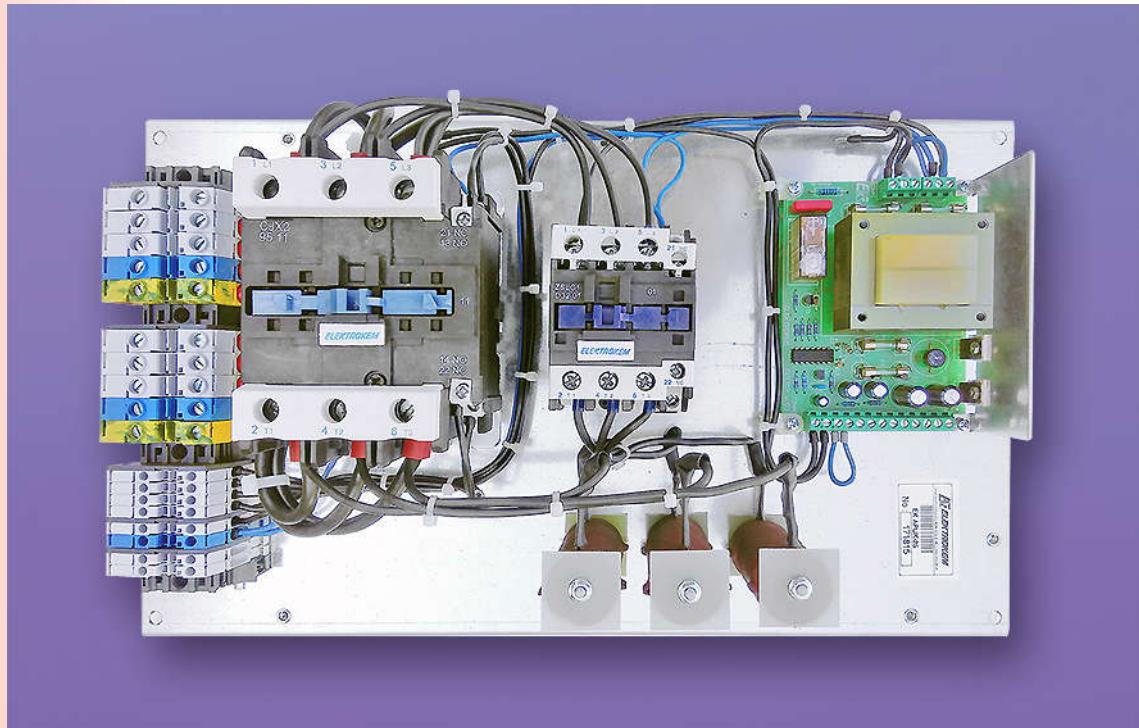

The Soft Start Module, type EK APUK-25, prevents a sudden increase in current when switching on the device with inductive characteristics that can cause disturbance or malfunctions of the devices.

Soft start modul, tip EK APUK-25 prilikom uključenja uređaja s induktivnim karakteristikama spričava nagli porast uklopne struje koji može prouzročiti smetnje ili kvar sklopova uređaja koji se uključuje.

Soft start modul, tip EK APUK-25 ograničava iznos uklopne struje prvih 5 sekundi, nakon čega se isključuje te ne utječe na daljnji rad uređaja.

**UNINTERRUPTIBLE
POWER SUPPLY**

EK ELEKTROKEM




OB 98/01

Industrijska elektronika



A. Šenoje 69, Vugrovec, 10360 Sesvete, Hrvatska
tel. +385 1 2051 400, fax. +385 1 2051 406
elektrokem@elektrokem.hr
<http://www.elektrokem.hr>

Kataloški list br. E06121

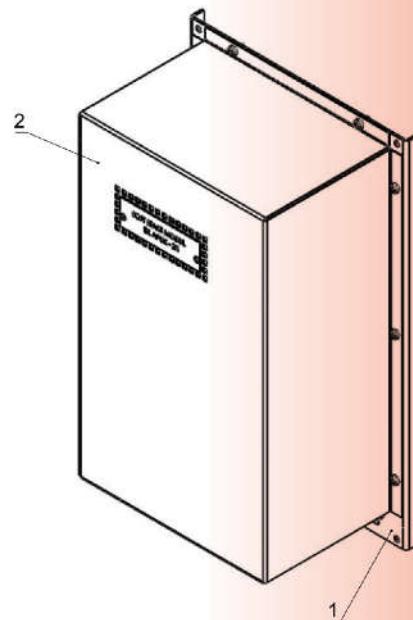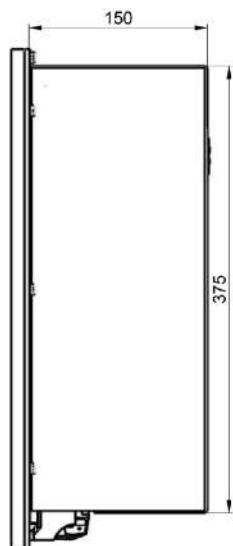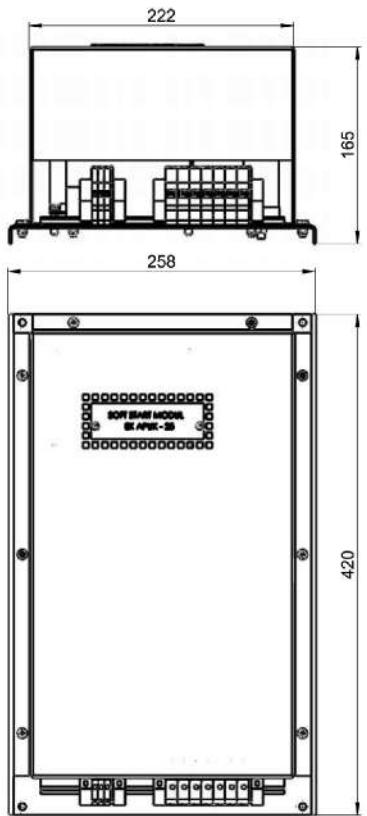

Input voltage / Ulazni napon	3x230 V AC
Output voltage / Izlazni napon	3x230 V AC
Consumption during operation / Potrošnja sklopa tijekom rada	~15W
Temperature range / Radna temperatura okoline	- 25°C to +40°C
Dimensions / Dimenzije:	Width x Depth x Height / Širina x Dubina x Visina 257 x160 x 420 mm
Weight / Masa	5000 g