

PLATFORM INFORMATION DISPLAY

Kolosiječna informacijska ploča

Broj dijela: E60417

EK KIP-1



The track information dashboard has a two-sided view of the information. Each side contains an analog clock and two rows of LED panels to display information. Each LED panel can display 20 characters. The character color is amber. The panel is black and the watch is approximately 300 mm in diameter.

FEATURES

- Two-sided view of data; two rows of data are displayed on each side
- First order data order:
 - Planned time of arrival (departure) of the train
 - Train category - passenger, fast, international
 - Type of ride - arrival / departure
 - Train delay time
- Second order data order:
 - Departure or arrival station display, identical text on main info bar
- Time display on analog clock
- Control locally from your local station and remotely

Kolosiječna informacijska ploča ima dvostrani prikaz informacija. Svaka strana sadrži analogni sat i dva reda LED prikaza informacija. Svaki LED panel može prikazati 20 znakova. Boja znakova je amber. Ploča je crne boje, a sat je promjer

KARAKTERISTIKE

- Dvostrani prikaz podataka; na svakoj od strana prikazuju se dva reda podataka
- Redoslijed prikaza podataka prvog reda:
 - Planirano vrijeme dolaska (odlaska) vlaka
 - Kategorija vlaka – putnički, brzi, međunarodni
 - Vrsta vožnje - dolazak/odlazak
 - Vrijeme kašnjenja vlaka
- Redoslijed prikaza podataka drugog reda:
 - Prikaz kolodvora u odlasku, odnosno dolasku, identičan tekst na glavnoj inf.ploči
- Pokazivanje vremena na analognom satu
- Upravljanje lokalno iz lokalnog kolodvora te daljinski

**PASSENGER
INFORMATION
SYSTEM**




ELEKTROKEM



industrijska elektronika

A. Šenoa 69, Vugrovec, 10360 Sesvete, Hrvatska
tel. +385 1 2051 400, fax. +385 1 2051 406
elektrokem@elektrokem.hr
http://www.elektrokem.hr

Kataloški list br. E06137

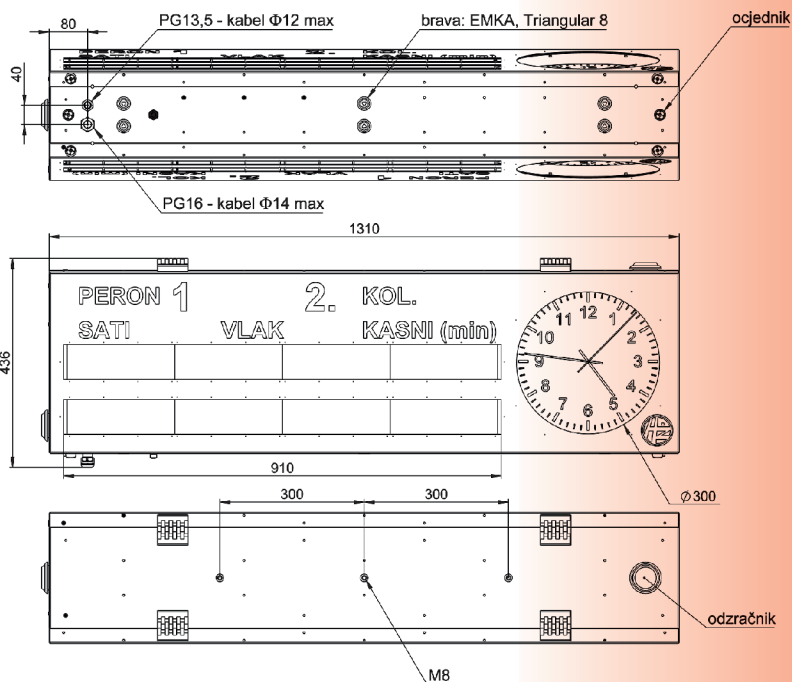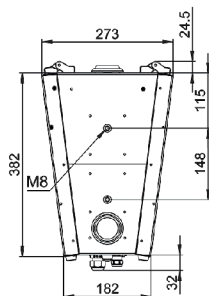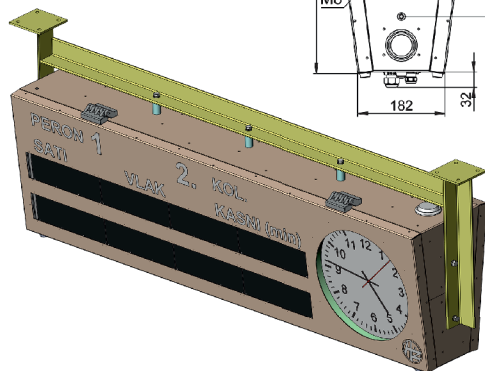

Operating temperature / Radna temperatura	-20°C do 60°C
Storage temperature / Temperatura skladištenja	-30°C do +85°C
Moisture / Vлага	10% - 90% non-condensing / nekondenzirajuća
User interfaces / Korisnička sučelja	RS232 / RS485
Average consumption / Prosječna potrošnja	60W
Maximum consumption / Maksimalna potrošnja	80W (all LEDs light max. brightness / sve LED diode svjetle max. svjetlinom)
Network interface / Mrežno sučelje	100 Base-FX, SC single-mode optical communication connector / konektor za single-mode optičku komunikaciju
Power supply / Napajanje	48V
Dimensions / Dimenzije (dxvxš)	1310 x 436 x 200 mm
Housing / Kućište	
Mechanical protection / Mehanička zaštita	IP65/IK10
Color / Boja	Black color / crna boja RAL 9011
Construction material / Materijal izrade	metal
LED indicators / indikatori	
Color / Boja:	Amber
Visibility angle / Kut vidljivosti:	>120°
Readability distance / Udaļjenost čitljivosti:	do 15m
Character height / Visina znakova:	55 mm
Illumination / Osvjetljenje (luminance):	> 2000 cd/m²

Screen printing on the front of the board: above the first row in white RAL 9010, 35 mm high, ARIAL-BOLD contents: HOURS / TRAIN / LATE (min) / Sitotisak na prednjoj strani ploče: iznad prvog reda u bijeloj boji RAL 9010, visine 35 mm, ARIAL-BOLD sadržaja: SATI / VLAK / KASNI (min)